# Accentra Pellet Stove



et the warmth win you over. The Accentra will captivate you with the convenience of pellet's unwavering even heat. Seamlessly incorporate the Accentra pellet stove into
your life with its elegant cast iron construction, clean lines and minimal maintenance.



Cover: Accentra shown in porcelain majolica brown with Harman Protect Cast Iron Hearth Pad Above: Accentra shown in matte black

### **Features**

- Clean, elegant cast iron styling
- · View fuel levels easily with tinted hopper lid
- · Less loading with 50lb hopper capacity
- Less maintenance with large ash pan
- Elegant flame-reactive mirrored glass
- · Installation made easy with direct vent

## **Options**

- · Matte black or porcelain majolica brown Finish
- Leg kit (matte black only)
- Harman Protect Cast Iron Hearth Pad (matte black only)
- Direct vent wall pass-through
- Outside air kit





Leg kit (available in matte black only)






Key Technologies More than 35 years of engineering excellence and heating performance, distilled into these exclusive technologies.

ESP Temperature Control Harman pellet stoves utilize an advanced Exhaust Sensing Probe (ESP) system to deliver precise heating control. ESP constantly monitors and adjusts heat output to maintain set room temperatures within one degree.






PelletPro<sup>™</sup> System This patented system makes it possible to burn any grade of pellet fuel with maximum heat and efficiency. A bottom-up feed system burns each pellet completely and allows for 24-hour heating.

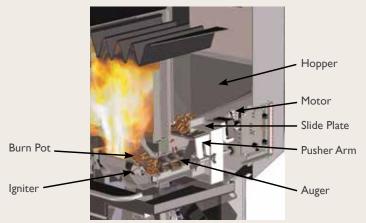


# Accentra Specifications and Clearances

<b>C</b>		ations	
NDDC	ITIC	ations	
JUEL	IIICo	auons	э.


	_
BTU/Hr Input <sup>2</sup>	9,700-38,800
Efficiency <sup>3</sup>	82%
Emissions	0.62g/hr
Heating Capacity <sup>4</sup>	900-2,400 sq ft
Hopper Capacity	50lbs
Fuel Type	.Pellet
Feed Rate	.1.1-4.3lb/hr
Venting Size	.3"



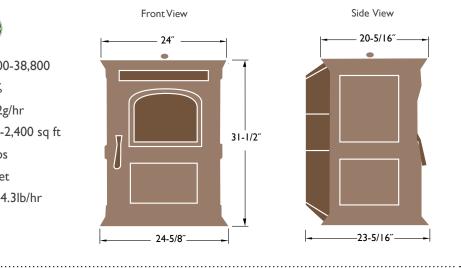


## **Clearance to Combustibles**

Minimum Floor Protection		
Standard	24-1/16" × 28-5/8"	
Corner	28-5/8" x 24-1/16"	



Standard Installation

Corner Installation



Corner floor protection: 28-5/8" x 24-1/16" minimum

# A Standard of Excellence

In 1979, Dane Harman used his welding skills and design talent to build his first wood stove, setting the stage for a journey full of entrepreneurial energy and innovation. Built to a Standard and Not a Price has remained an unwavering promise since that first model was constructed, and is exemplified today through Harman's multiple patents and industry awards. Harman heating solutions are built to withstand the test of time with reliable warmth and aesthetic elegance, staying true to Dane's dedication to optimal performance and engineering excellence.



### Available From:

WWW.HARMANSTOVES.COM

facebook.com/HarmanStoves twitter.com/HarmanStoves utube.com/HarmanStoves HAR-1102U-0616

#### LIMITED LIFETIME WARRANTY<sup>5</sup> The strongest in the industry, Harman provides a limited lifetime warranty on most important aspects: firebox and heat exchanger.

<sup>1</sup>Trim kit and tile accents required to complete the stove. <sup>2</sup>EPA tested input Weighted Average LHY (Low Heating Value) Efficiency. <sup>4</sup>See your local authori Harman dealer for help in determining the product that best suits your heat

E 1509-04. ULC/ORD-C1482-M1990. ULC-S627-00 ct to change without notice. duct selection only. Fuel density and pelle nelv HO1 . To lear a safe distance a