

heatilator®

The first name in fireplaces



Rave Series

Direct Vent Gas Fireplace

Rave Series



modern style
best value

The Rave is the best-value modern linear fireplace available. Its long, unbroken ribbon of flame dances within a sleek landscape design to provide elegant warmth and ambiance. Explore unique placements and create a custom look with diverse finishing options. Experience all the Rave. Add modern style and proven value to your home or office.

Features


- 32 or 42-inch viewing area
- Moderate heat output—up to 26,000 BTUs
- Multiple interior finishing options
- Convex or flat front options
- Enhanced safety with the IntelliFire™ Ignition System

Options

Fronts



Deco / Rave42



Deco / Rave32
Illusion / Rave32




Illusion/Rave42 (two-piece)

Illusion Top view



Finishes



Black



Bronze

Interiors



Black Glass



Crystal Glass



Ceramic Fiber
Stones



Reflective
Black Glass Liner

Controls

SmartRemote

Features: battery-powered or hardwired receiver, timer mode, thermostat mode, room temperature readout, on/off



Technology

IntelliFire™ Ignition System


The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs. To learn more, visit heatilator.com.

Direct Vent Technology

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality. To learn more, visit heatilator.com.

Heat Zone Technology (optional)

Draw heat from the Rave into another room of the home, up to 20 feet away. When a heat zone kit is run continuously, it can redirect up to 25% of the heat produced to another area. Two heat zone kits can be run together to redirect up to 50% of the total heat output.

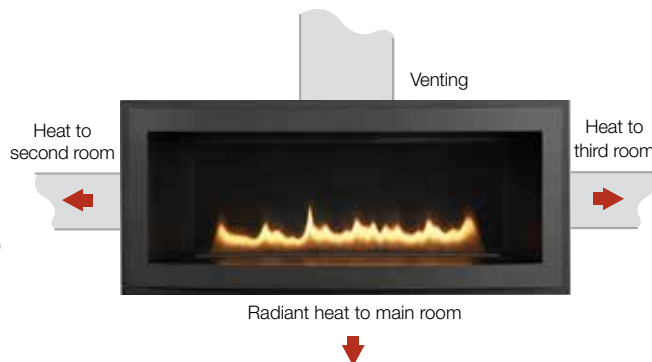

Cover: Rave 32 shown with Deco front in black, reflective black glass liner and ceramic fiber stones


Above: Rave 42 shown with Illusion front in black and black glass media




Specifications

MODEL	FRONT WIDTH	BACK WIDTH	HEIGHT	DEPTH	VIEWING AREA	BTU/HR INPUT
RAVE4013I	48" (1218mm)	37-3/4" (959mm)	41" (1042mm)	18-1/4" (464mm)	39-1/16" X 13-1/4" (993mm x 337mm)	26,000 NG 25,000 LP
RAVE3012I	36-3/4" (933mm)	25-3/4" (654mm)	37" (914mm)	18-1/4" (464mm)	27-1/4" X 13-1/4" (692mm x 292mm)	20,000 NG 17,500 LP

RAVE4013I

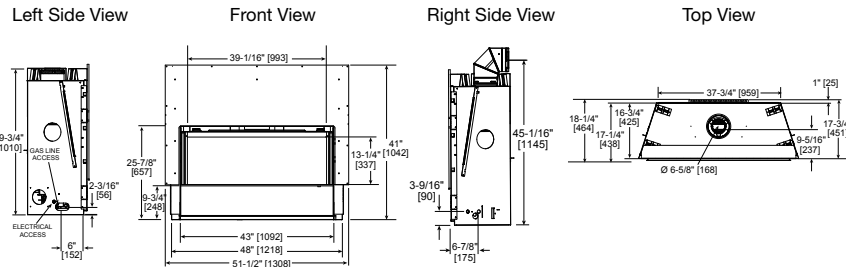


RAVE3012I

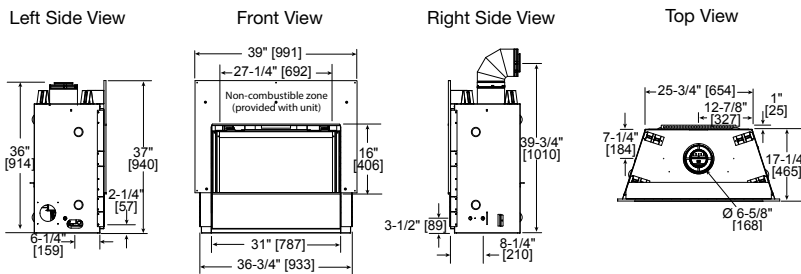

Framing

MODEL	A	B	C	D
RAVE4013I	8-5/8" (219mm)	40-1/4" (1023mm)	18-1/4" (464mm)	50" (1270mm)
RAVE3012I	8-5/8" (219mm)	36-1/2" (927mm)	18-1/4" (464mm)	37-3/4" (959mm)



Efficiency Ratings

Rating	RAVE4013I	RAVE3012I
Steady State	72.7% (NG)	68.3% (NG)
AFUE	55.5% (NG)	57.4% (NG)
EnerGuide (CSA P.4.1-02)	57.0% (NG)	57.4% (NG)

Steady State - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state."

AFUE - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

EnerGuide (CSA P.4.1-02) - Used in Canada and some U.S. states to measure annual fireplace efficiency.

Exceptional Value + Dependability

Why do contractors, architects and homebuyers trust Heatilator? Because we mix value with dependability. Established in 1927, Heatilator has built a long standing reputation for providing quality, dependable hearth products at unbeatable values. Today, Heatilator remains the most preferred, recommended and installed fireplace brand among building professionals.

Available from

heatilator
The first name in fireplaces

800-927-6841 | heatilator.com
facebook.com/Heatilator
twitter.com/Heatilator
youtube.com/HeatilatorFireplaces

Limited Lifetime Warranty¹

The strongest in the industry, Heatilator provides a limited lifetime warranty on gas-burning products of the most important aspects: firebox and heat exchanger.

The information provided in this literature is for planning purposes only and subject to change. Please consult the installation manual for actual installation. Actual product appearance may differ from product images.

¹ For full warranty details go to heatilator.com.

HTL-1064U-0616

