
&

SLIMLINE FUSION

DIRECT VENT GAS FIREPLACES





HEAT & GLO

INNOVATIVE
VERSATILITY

SLIMLINE FUSION

SlimLine Fusion Direct Vent gas fireplaces can be personalized with modern style or traditional ambiance. Create a style uniquely yours—a fusion of modern and traditional elements.

Amplify your style today, or upgrade your space years from now. It's all possible with SlimLine Fusion gas fireplaces.



FRONT OPTIONS



FIRESCREEN
Included standard. Available in black only.



CLEAN FACE KIT
Add clean lines and sleek style.



REFLECTIVE GLASS LINER
Complement your flame with an optional reflective glass liner.



TRIM KIT
Available in three or four-sided kits in black or stainless steel.



BLACK STAINLESS STEEL (SL-5F ONLY)

CLEAN FACE FRONT FINISHES

BLACK

GRAPHITE

NEW BRONZE

GLASS, STONE AND LOG OPTIONS



CRYSTAL GLASS



COBALT GLASS



BLACK GLASS



AMBER GLASS



WHITE GLASS BEADS




BLACK GLASS BEADS



CLEAR GLASS BEADS



CERAMIC FIBER STONES



LOGS (STANDARD)

CONTROLS

Add an optional wall switch or remote for enhanced convenience. For more information on available control options, visit heatnglo.com.



FAN

Enhance heating performance and efficiency with an optional fan kit.



LEFT: SL-5F shown with optional black glass media, reflective liner and clean face front
 ABOVE: SL-7F shown with standard logs and firescreen front with optional reflective liner, kenwood mantel and wheatfield granite
 COVER: SL-5F

SLIMLINE FUSION TECHNOLOGIES



INTELLIFIRE™ IGNITION SYSTEM

The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs.




DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.

SLIMLINE FUSION SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HOUR INPUT
	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING		
SL-5F	36 [914]	37 [940]	25-3/4 [654]	37 [940]	34-3/8 [873]	34-3/4 [883]	16-5/16 [414]	16-1/4 [413]	27-3/16 x 18-1/16 [691 x 459]	12,000-17,500 (NG) 13,500-17,000 (LP)
SL-7F	41 [1041]	42 [1067]	30-3/4 [781]	42 [1067]	37-7/8 [962]	38-1/4 [972]	16-5/16 [414]	16-1/4 [413]	32-1/16 x 21-1/2 [814 x 546]	16,500-24,000 (NG) 16,500-20,500 (LP)

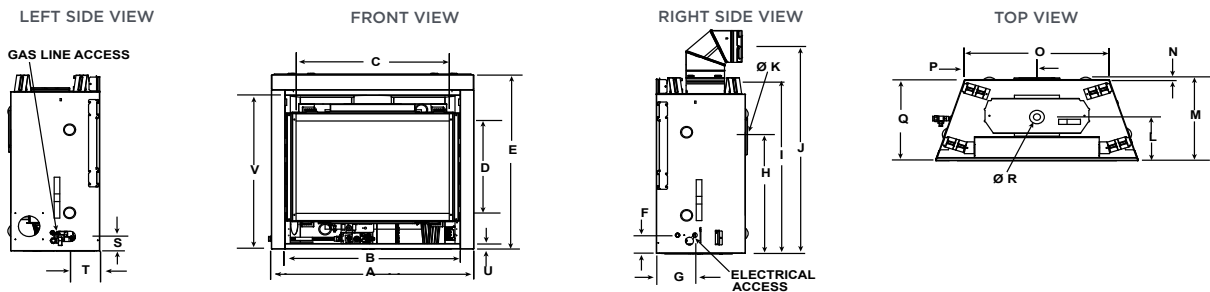

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V
SL-5F	36 [914]	31-1/8 [791]	27-3/16 [691]	18-1/16 [459]	34-1/16 [865]	3-9/16 [91]	6-7/8 [175]	23-3/8 [594]	34-3/8 [873]	35-1/2 [902]	8 [203]	8-13/16 [224]	16-5/16 [414]	1/2 [13]	25-3/4 [654]	12-7/8 [327]	15-7/8 [403]	6-5/8 [168]	2-3/16 [55]	6 [152]	1 [25]	30-1/16 [764]
SL-7F	41 [1041]	36-1/8 [918]	32-1/16 [814]	21-1/2 [546]	37-5/8 [955]	3-9/16 [91]	6-7/8 [175]	26-7/8 [683]	37-7/8 [962]	39-15/16 [1014]	8 [203]	8-13/16 [224]	16-5/16 [414]	1/2 [13]	30-3/4 [781]	15-3/8 391	15-7/8 [403]	6-5/8 [168]	2-3/16 [56]	6 [152]	1 [25]	33-9/16 [853]

Dimensions are in inches and millimeters. Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions shipped with product. We recommend measuring individual units at installation. Assumes the use of 1/2" sheetrock. NOTE: Combustible material should not cover the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo® reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.

U.S. EFFICIENCIES

Steady State - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

AFUE - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

RATING	SL-5F	SL-7F
STEADY STATE	68% (NG)	74% (NG)
AFUE	48.5% (NG)	57.1% (NG)

CANADA EFFICIENCIES

EnerGuide (CSA P.4.1-02) - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

RATING	SL-5F	SL-7F
ENERGUIDE (CSA P.4.1-02)	51% (NG)	56% (NG)

For complete information on this model, please contact us at:



No one builds a better fire

Web: heatnglo.com
Phone: (888) 427-3973 (952) 985-6000
E-mail: info@heatnglo.com

- facebook.com/HeatandGlo
- twitter.com/HeatandGlo
- youtube.com/HeatandGlo

HNG-1130U-1216

LIMITED LIFETIME WARRANTY*

The strongest in the industry, Heat & Glo® provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

* For full warranty details, go to www.heatnglo.com.

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplacesafety

