


&

SLIMLINE

DIRECT VENT GAS FIREPLACES



HEAT & GLO

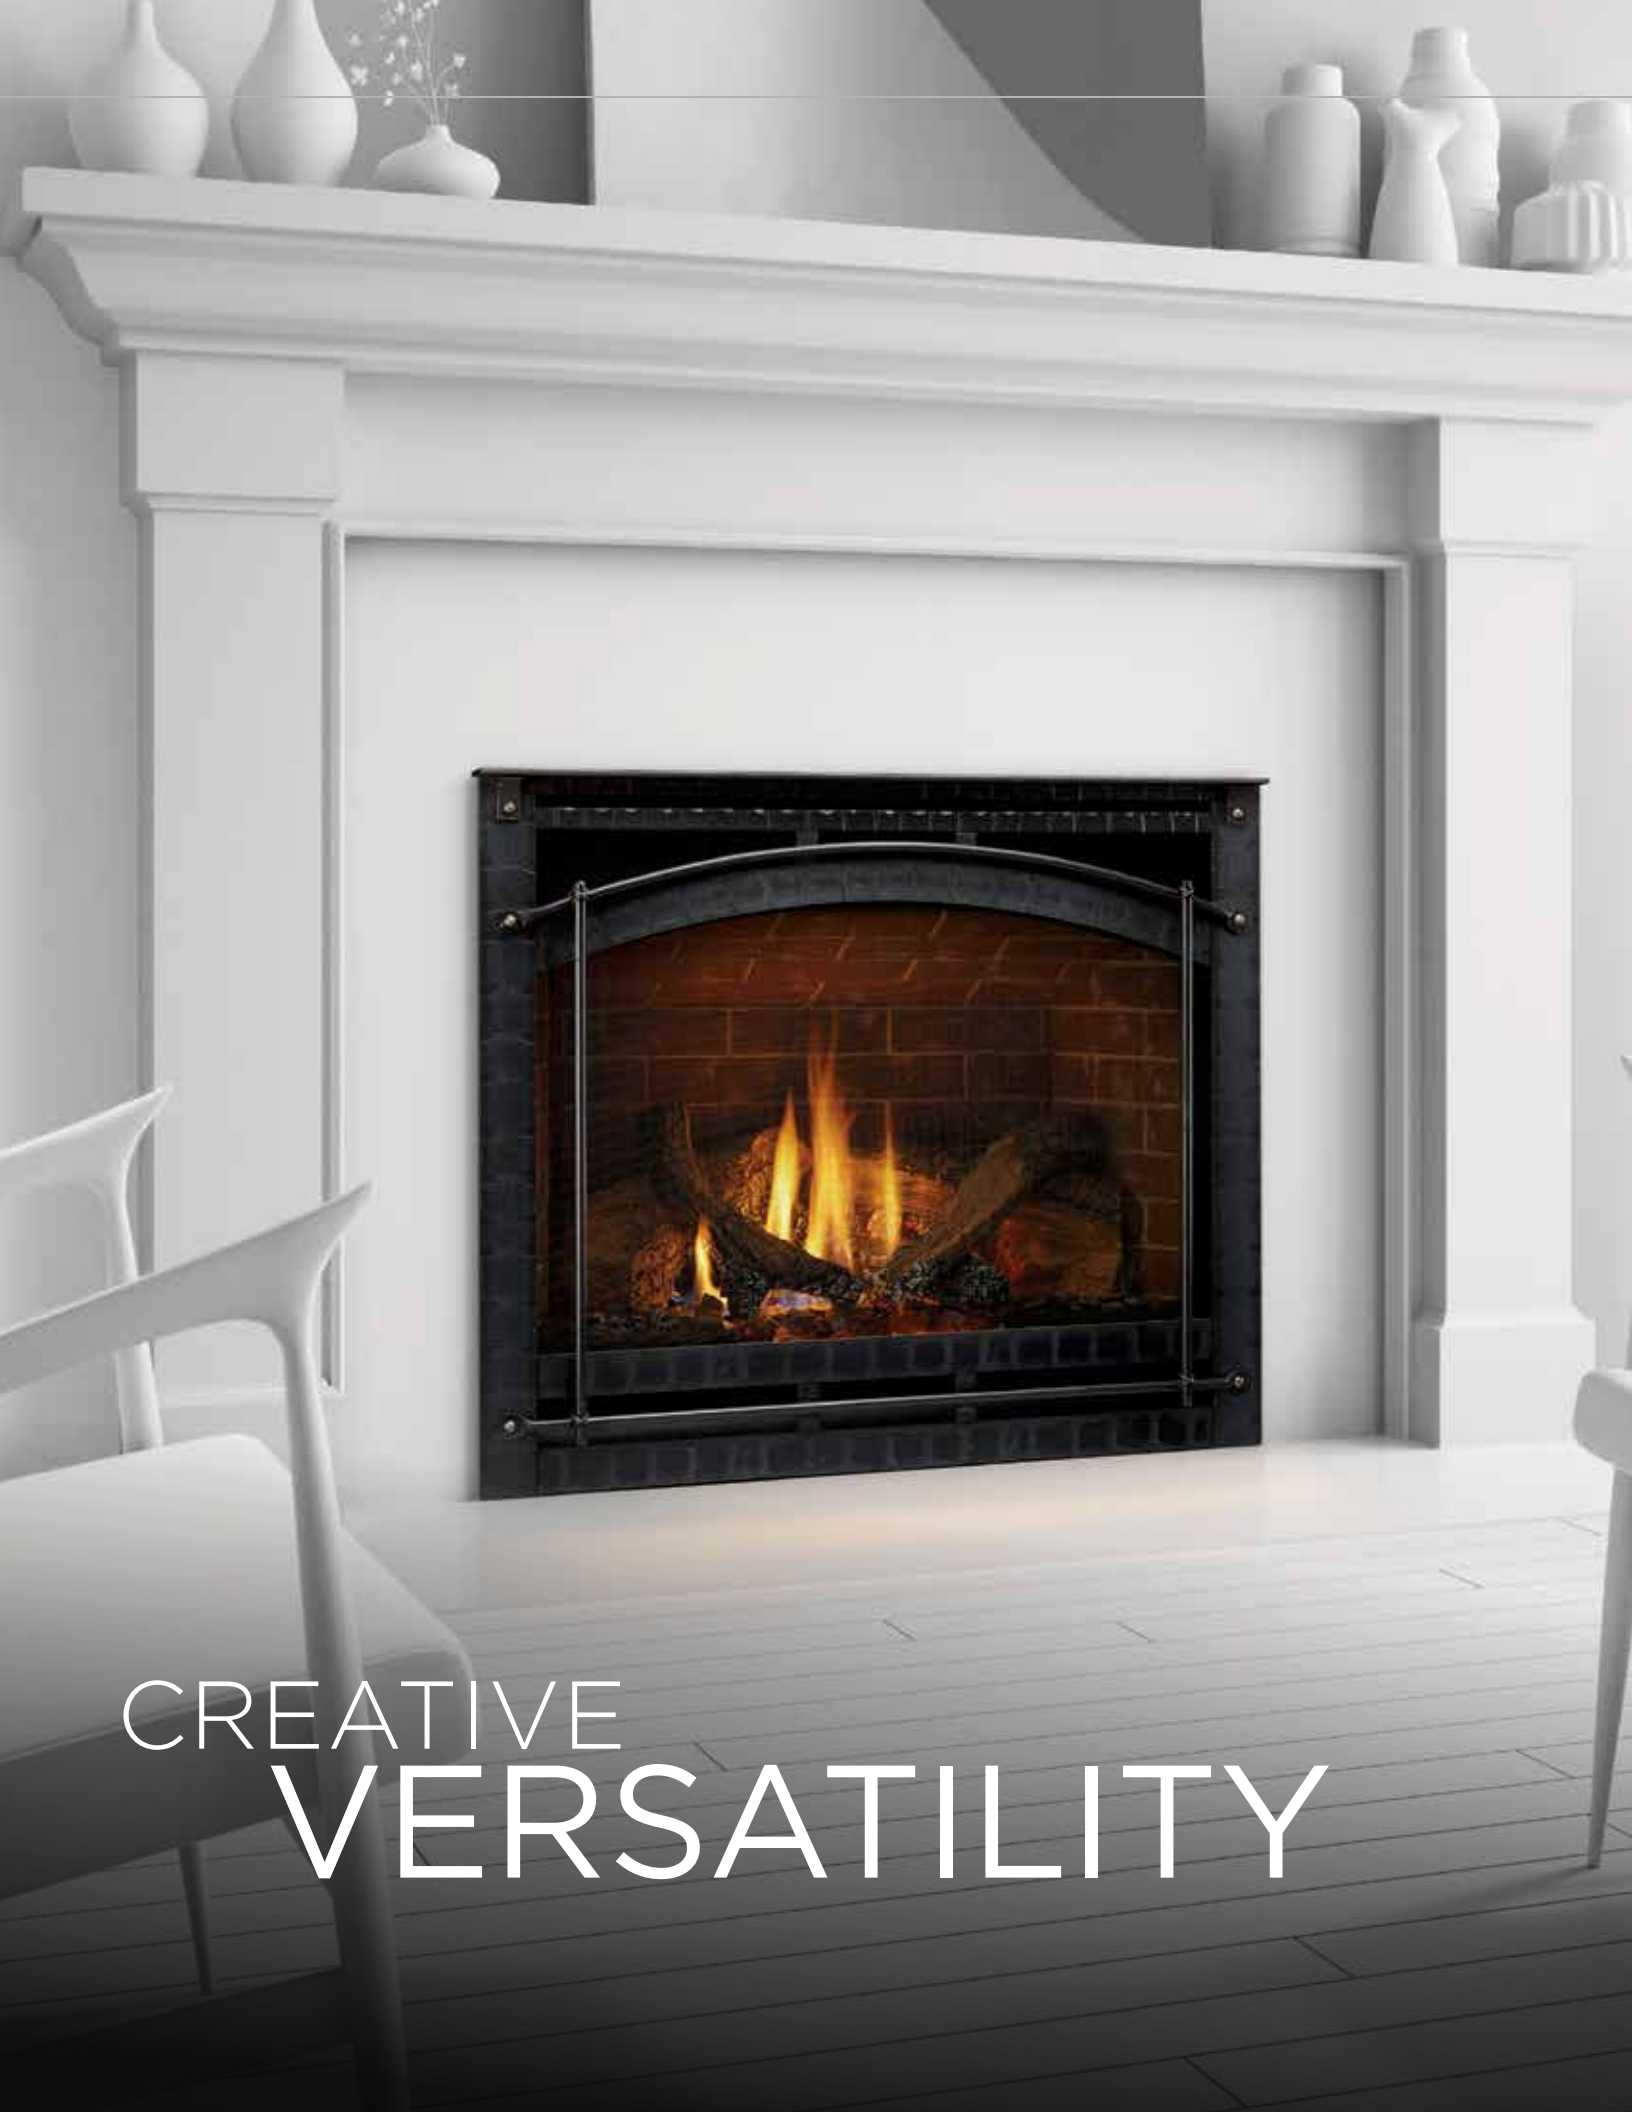

CREATIVE
VERSATILITY

SLIMLINE

SlimLine fireplaces fit where others don't. Slender profiles make unique installations a reality. Bring your vision to life with multiple models, sizes and finishing options. The ideal combination of flame, glow and logs create a fireside experience you never want to leave.

Upgrade the ambiance with the X collection. These enhanced fireplaces offer more heat, detailed high-definition logs, eye-catching LED embers and more.

RIGHT SIZE FOR ANY SPACE

Find the right fire to fill your space. Select from 28, 32, 36 and 42-inch wide sizes. Let creative installations inspire. At just 16 inches deep, space is no longer a constraint.

FEEL THE REALISM

Flame, glow and logs come together for an immersive experience. Take it to the next level with the additional heat and options of the X collection, and lose yourself in the looks and warmth of your SlimLine.

FIT YOUR STYLE

Personalize the aesthetics of the fireplace. Style the front with decorative trims and finishes, choose interior elements, and enrich the appearance with advanced selections. Opt for modern drama, authentic masonry, or somewhere in-between.



LEFT: SL-7X shown with chateau
forge front and kenwood mantel

COVER: SL-7X




TOP: SL-5 shown with firescreen front in black, fade-resistant black glass and custom surround

BOTTOM: SL-3X shown with chateau front in new bronze and custom mantel

SPACE. SIZE. SELECT.

Consider heat output, room dimensions and venting in your space. And then select a 28, 32, 36 or 42-inch wide model.

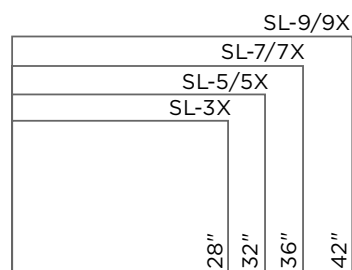


CHOOSE YOUR MODEL

SL MODELS: The ideal combination of flame, glow and logs.

X COLLECTION MODELS: X collection fireplaces offer more heat, detailed high-definition logs, eye-catching LED embers and more.

FEATURES	SL-3X	SL-5	SL-5X	SL-7	SL-7X	SL-9	SL-9X
Fireplace Width	28"	32"	32"	36"	36"	42"	42"
Room Size Fit	Small	Small to medium	Small to medium	Medium to large	Medium to large	Medium to large	Medium to large
BTU/hr Input	11,500-21,000	14,900-21,000	14,500-27,500	17,500-25,000	17,500-30,500	23,500-30,000	18,000-35,000
Stratford Brick Interior Panels	Standard (four-piece)	Optional (three-piece)	Standard (four-piece)	Optional (three-piece)	Standard (four-piece)	Optional (three-piece)	Standard (four-piece)
Fade-Resistant Black Glass Interior Panels	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Fan Kit	Standard	Optional	Standard	Optional	Standard	Optional	Standard
Remote Control	Standard	Optional	Standard	Optional	Standard	Optional	Standard
Wall Switch	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Logs	Five high-definition logs	Five standard-definition logs	Five high-definition logs	Five standard-definition logs	Five high-definition logs	Five standard-definition logs	Five high-definition logs
Embers	LED illuminated embers	Glowing embers	LED illuminated embers	Glowing embers	LED illuminated embers	Glowing embers	LED illuminated embers
Glass	Ceramic	Tempered	Ceramic	Tempered	Ceramic	Tempered	Ceramic
Ignition System	IntelliFire™ Plus	IntelliFire	IntelliFire Plus	IntelliFire	IntelliFire Plus	IntelliFire	IntelliFire Plus
Flame Turndown	50%	30%	50%	30%	50%	30%	50%




FRONT OPTIONS



CHATEAU FORGE
Available for SL-5/5X, SL-7/7X and SL-9/9X models in handcrafted, hammered steel.



CHATEAU
Available for all models in black, new bronze or graphite.

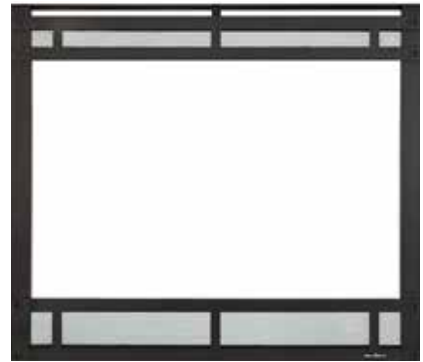

HALSTON
Available for all models in black, new bronze or graphite.



ARCADIA
Available for SL-5/5X, SL-7/7X and SL-9/9X models in black, new bronze or graphite.




CLEAN FACE
Available for SL-5/5X, SL-7/7X and SL-9/9X models in black, new bronze or graphite.



FIRESCREEN
Available for all models in black.

FINISHES



BLACK



NEW
BRONZE



GRAPHITE

INTERIOR PANEL OPTIONS

Change the look of the fireplace with interior panel options. Choices range from brick panels that give the appearance of an authentic masonry fireplace, to reflective fade-resistant black glass for modern drama.



STRATFORD BRICK PANELS
Included standard on X collection models.
Optional upgrade for SL models.



FADE-RESISTANT BLACK GLASS PANELS
Optional upgrade for all models.

SELECT A MANTEL SYSTEM

Complete your SlimLine with distinctive style. A variety of mantel systems can transform your space. Select from a range of styles. Visit heatnglo.com for more options and additional information on mantel systems, shelves and stone surrounds.



CONTROL OPTIONS

		Wall Switch or Remote Control	On/ Off	Fan Speed	Flame High/Low	Pilot Activation	AUX Function	Temp Readout	Thermostat Mode	Timer Mode	Battery Strength Indicator	Auto Battery Backup
X COLLECTION CONTROLS												
RC300 (included standard with X collection)		Remote w/ Docking Station	•	•	•	•	•	•	•	•	•	•
SL CONTROLS												
WSK200-HNG		Wall	•	•		•					•	•
WSK-MLT		Wall	•	•	•	•	•	•	•			
SMART-STAT-HNG		Remote	•					•	•	•		
RCT-MLT-HNG		Remote	•	•	•			•	•	•		

SLIMLINE TECHNOLOGIES




INTELLIFIRE IGNITION SYSTEM

The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs. IntelliFire Plus (IPI Plus) takes this technology to the next level with more safety and memory settings and a programmable wireless remote control.



DIRECT VENT TECHNOLOGY

With Direct Vent fireplaces and inserts, 100% of combustion exhaust and fumes are removed from your home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.



POWER VENTING TECHNOLOGY

Fireplaces aren't just for exterior walls. A fan-powered accessory with slim venting can zigzag throughout your home—up, down, over or under—making it possible to install a gas fireplace virtually anywhere. This ensures safe fireplace operation and the best flames. Check with your local hearth professional to determine if your home or fireplace could benefit from power venting technology.




LED EMBER BED

Add an extra layer of dimension and light to your fire. Realistic illuminated LED embers let you enjoy the ambiance, with or without the fire.




FADE-RESISTANT BLACK GLASS PANELS

A clean modern look never gets dull. Just like this black glass interior. It's hot. And looks that way, too. For the life of your fireplace.



HEAT MANAGEMENT TECHNOLOGY


Bring the warmth from your fireplace to the rest of your home, up to 20 feet away. Heat management technology can redirect up to 50% of the heat to another area, also reducing wall temperatures above the fireplace. Choose between a heat zone kit to transfer heat where you want it, or utilizing your existing furnace ductwork with a heat duct kit.

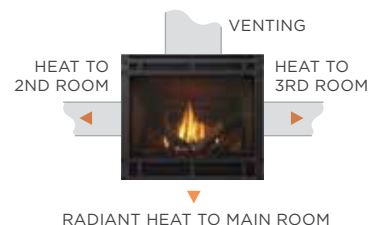


SLIMLINE SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HR INPUT (NG)
	ACTUAL	FRAMING	ACTUAL	FRAMING	ACTUAL	FRAMING	ACTUAL	FRAMING		
SL-3X	33 [838]	34 [864]	22-3/4 [578]	34 [864]	32-3/8 [822]	32-3/4 [832]	16-1/4 [413]	16-1/4 [413]	24-1/8 X 16 [613 x 406]	11,500-21,000
SL-5/5X	36 [913]	37 [940]	25-3/4 [653]	37 [940]	34-3/8 [873]	34-3/4 [882]	16-5/16 [415]	16-1/4 [413]	27-3/16 X 18-1/16 [691 x 459]	14,900-21,000 (5) 14,500-27,500 (5X)
SL-7/7X	41 [1041]	42 [1067]	30-3/4 [781]	42 [1067]	37-7/8 [962]	38-1/4 [972]	16-5/16 [415]	16-1/4 [413]	32-1/16 X 21-1/2 [814 x 546]	17,500-25,000 (7) 17,500-30,500 (7X)
SL-9/9X	48 [1218]	49 [1245]	37-3/4 [959]	49 [1245]	39-9/16 [1005]	40-1/4 [1022]	16-5/16 [415]	16-1/4 [413]	39-1/16 X 23-9/16 [992 x 599]	23,500-30,000 (9) 18,000-35,000 (9X)


TOP VIEW

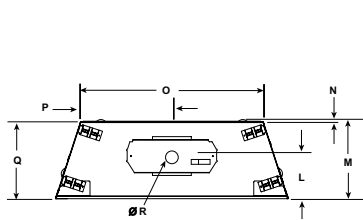


LEFT SIDE VIEW



FRONT VIEW



RIGHT SIDE VIEW



MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
SL-3X	33 [838]	28-1/8 [714]	24-1/8 [613]	16 [406]	32-1/8 [816]	3-1/2 [89]	6-7/8 [175]	21-3/8 [543]	32-3/8 [822]	34-1/2 [876]	8 [203]	8-3/4 [222]	16-1/4 [413]	1/2 [13]	22-3/4 [578]	11-3/8 [289]	15-7/8 [403]	6-5/8 [168]	2-1/8 [54]	6 [152]	1 [25]	28 [711]	5 [127]	14 [356]	9-1/8 [232]
SL-5/5X	36 [914]	31-1/8 [791]	27-3/16 [691]	18-1/16 [459]	34-1/16 [865]	3-9/16 [90]	6-7/8 [175]	23-3/8 [594]	34-3/8 [873]	36-7/16 [926]	8 [203]	8-13/16 [224]	16-5/16 [414]	1/2 [13]	25-3/4 [654]	12-7/8 [327]	15-7/8 [403]	6-5/8 [168]	2-3/16 [56]	6 [152]	1 [25]	30-1/16 [764]	5 [127]	14 [356]	9-1/8 [232]
SL-7/7X	41 [1041]	36-1/8 [918]	32-1/16 [814]	21-1/2 [546]	37-5/8 [956]	3-9/16 [90]	6-7/8 [175]	26-7/8 [683]	37-7/8 [962]	39-15/16 [1014]	8 [203]	8-13/16 [224]	16-5/16 [414]	1/2 [13]	30-3/4 [781]	15-3/8 [391]	15-7/8 [403]	6-5/8 [168]	2-3/16 [56]	6 [152]	1 [25]	33-9/16 [853]	5 [127]	14 [356]	9-1/8 [232]
SL-9/9X	48 [1219]	43 [1092]	39-1/16 [992]	23-9/16 [599]	39-9/16 [1005]	3-9/16 [90]	6-7/8 [175]	28-7/8 [733]	39-7/8 [1013]	41-15/16 [1065]	8 [203]	8-13/16 [224]	16-5/16 [414]	1/2 [13]	37-3/4 [959]	18-7/8 [479]	15-7/8 [403]	6-5/8 [168]	2-3/16 [56]	6 [152]	1 [25]	37-9/16 [955]	5 [127]	14 [356]	9-1/8 [232]

Dimensions above are in inches and millimeters. Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions shipped with product. We recommend measuring individual units at installation. Assumes the use of 1/2-inch drywall. NOTE: Combustible material should not cover the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.

U.S. EFFICIENCIES

Steady State - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

AFUE - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

RATING	SL-3X	SL-5	SL-5X	SL-7	SL-7X	SL-9	SL-9X
STEADY STATE	72.8%	69.8%	73.4%	69.9%	75.0%	69.1%	77.0%
AFUE	67.4%	57.3%	62.8%	58.5%	64.6%	60.8%	67.1%

CANADA EFFICIENCIES

EnerGuide (CSA P.4.1-02) - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

RATING	SL-3X	SL-5	SL-5X	SL-7	SL-7X	SL-9	SL-9X
ENERGUIDE (CSA P.4.1-02)	69.1%	57.9%	64.0%	59.0%	66.4%	62.1%	69.0%

For complete information on this model, please contact us at:

HEAT & GLO

No one builds a better fire

Web: heatnglo.com
Phone: (888) 427-3973 (952) 985-6000
Email: info@heatnglo.com

[facebook.com/HeatandGlo](https://www.facebook.com/HeatandGlo)
twitter.com/HeatandGlo
[youtube.com/HeatandGlo](https://www.youtube.com/HeatandGlo)

HNG-1148U-1116

LIMITED LIFETIME WARRANTY*

The strongest in the industry, Heat & Glo® provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

*For full warranty details, go to www.heatnglo.com.

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplacesafety

