

# SLIMLINE FUSION

DIRECT VENT GAS FIREPLACE

HEAT & GLO



Available IntelliFire®  
app and voice control





# INNOVATIVE VERSATILITY




*TOP: SL-7F-IFT shown with Firescreen front, reflective black interior and standard logs*

*BOTTOM: SL-5F-IFT shown with Clean Face front, reflective black interior and black glass media*

# SLIMLINE FUSION

SlimLine direct vent gas fireplaces can be personalized with modern or traditional interiors to create a modern or traditional ambiance that is uniquely yours. Whether you are amplifying your style today, or upgrading your space years from now, it's all possible with a SlimLine Fusion gas fireplaces.

## FRONT OPTIONS

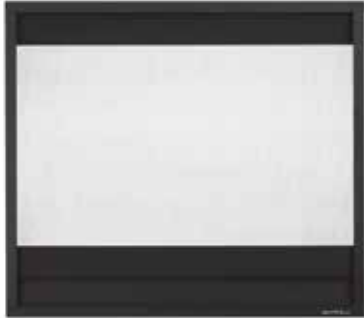


**FIRESCREEN**  
Included standard.  
Available in black only.



**CLEAN FACE KIT**  
Add clean lines and sleek style.


## CLEAN FACE FRONT FINISHES



BLACK



GRAPHITE



NEW  
BRONZE



**BLACK TRIM KIT**  
Available in three or four-sided kits.



**REFLECTIVE BLACK GLASS INTERIOR**  
Complement your flame with an optional reflective glass interior.

## STANDARD LOGS OR OPTIONAL GLASS AND STONES



LOGS  
(STANDARD)



CLEAR GLASS



EBONY GLASS



AMBER GLASS




COBALT GLASS



WHITE GLASS  
BEADS



BLACK GLASS  
BEADS



CLEAR GLASS  
BEADS



CERAMIC FIBER  
STONES

## CONTROLS

### INTELLIFIRE APP

All the features of a remote control with an app installed on your smart device. Monitor your fire from anywhere or even control it with the sound of your voice. IntelliFire is compatible with voice assistants Amazon Alexa and Google Assistant.



### TOUCHSCREEN REMOTE

Features: on/off, flame height adjustment, fan speed, lights adjustment, thermostat mode, room temperature readout, child lock, timer mode, battery backup, cold climate mode, power vent, wall docking station (fan, lights and power vent are dependent on your fireplace).



### WIRELESS WALL SWITCH

Features: on/off, battery strength indicator, cold climate mode



# SLIMLINE FUSION TECHNOLOGIES



## INTELLIFIRE TOUCH® IGNITION SYSTEM

IntelliFire Touch is our most advanced intermittent-pilot ignition (IPI) system, making operating your appliance simple, smart and safe. Select the IntelliFire app, touch-screen remote control or wireless wall switch for the solution that fits your lifestyle.




## DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.


### SLIMLINE FUSION SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HOUR INPUT
	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING		
SL-5F-IFT	36 [914]	37 [940]	25-3/4 [654]	37 [940]	34-3/8 [873]	34-3/4 [883]	16-5/16 [414]	16-1/4 [413]	27-3/16 x 18-1/16 [691 x 459]	12,000-19,500 (NG) 13,500-17,000 (LP)
SL-7F-IFT	41 [1041]	42 [1067]	30-3/4 [781]	42 [1067]	37-7/8 [962]	38-1/4 [972]	16-5/16 [414]	16-1/4 [413]	32-1/16 x 21-1/2 [814 x 546]	16,500-24,000 (NG) 16,500-20,500 (LP)


LEFT SIDE VIEW




FRONT VIEW

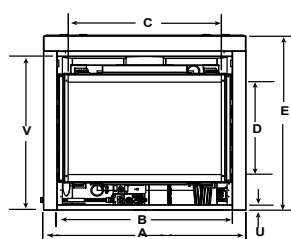

RIGHT SIDE VIEW

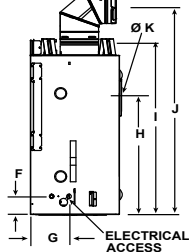

TOP VIEW

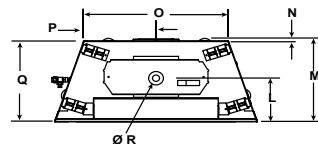

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V
SL-5F-IFT	36 [914]	31-1/8 [791]	27-3/16 [691]	18-1/16 [459]	34-1/16 [865]	3-9/16 [91]	6-7/8 [175]	23-3/8 [594]	34-3/8 [873]	35-1/2 [902]	8 [203]	8-13/16 [224]	16-5/16 [414]	1/2 [13]	25-3/4 [654]	12-7/8 [327]	15-7/8 [403]	6-5/8 [168]	2-3/16 [55]	6 [152]	1 [25]	30-1/16 [764]
SL-7F-IFT	41 [1041]	36-1/8 [918]	32-1/16 [814]	21-1/2 [546]	37-5/8 [955]	3-9/16 [91]	6-7/8 [175]	26-7/8 [683]	37-7/8 [962]	39-15/16 [1014]	8 [203]	8-13/16 [224]	16-5/16 [414]	1/2 [13]	30-3/4 [781]	15-3/8 391	15-7/8 [403]	6-5/8 [168]	2-3/16 [56]	6 [152]	1 [25]	33-9/16 [853]

Dimensions are in inches and millimeters. Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions shipped with product. We recommend measuring individual units at installation. Assumes the use of 1/2" sheetrock. NOTE: Combustible material should not cover the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo® reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.

For complete information on this model, please contact us at:

# HEAT & GLO®

No one builds a better fire

Web: [heatnglo.com](http://heatnglo.com)  
Phone: (888) 427-3973  
E-mail: [info@heatnglo.com](mailto:info@heatnglo.com)

[facebook.com/HeatandGlo](https://www.facebook.com/HeatandGlo)  
[twitter.com/HeatandGlo](https://twitter.com/HeatandGlo)  
[youtube.com/HeatandGlo](https://www.youtube.com/HeatandGlo)

HNG-1130U-0622


## LIMITED LIFETIME WARRANTY<sup>1</sup>

The strongest in the industry, Heat & Glo provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

1: For full warranty details see [heatnglo.com](http://heatnglo.com)

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit [www.heatnglo.com/fireplace-safety](http://www.heatnglo.com/fireplace-safety)

Google, YouTube and Google Home are trademarks of Google LLC. Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates.



## U.S. EFFICIENCIES

**Steady State** - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

**AFUE** - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

RATING	SL-5F-IFT	SL-7F-IFT
<b>STEADY STATE</b>	<b>68% (NG)</b>	<b>74% (NG)</b>
AFUE	48.5% (NG)	57.1% (NG)

## CANADA EFFICIENCIES

**EnerGuide (CSA P.4.1-15)** - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

RATING	SL-5F-IFT	SL-7F-IFT
<b>ENERGUIDE (CSA P.4.1-15)</b>	<b>51% (NG)</b>	<b>56% (NG)</b>